


Special Shape - Block Core

- Block-shaped geometry with Sendust and Permalloy Flux
- Multiple stacks and more flexible design available
- More design capability with flat wire winding technology
- 3 types of permeability, 40 μ , 60 μ , 90 μ available

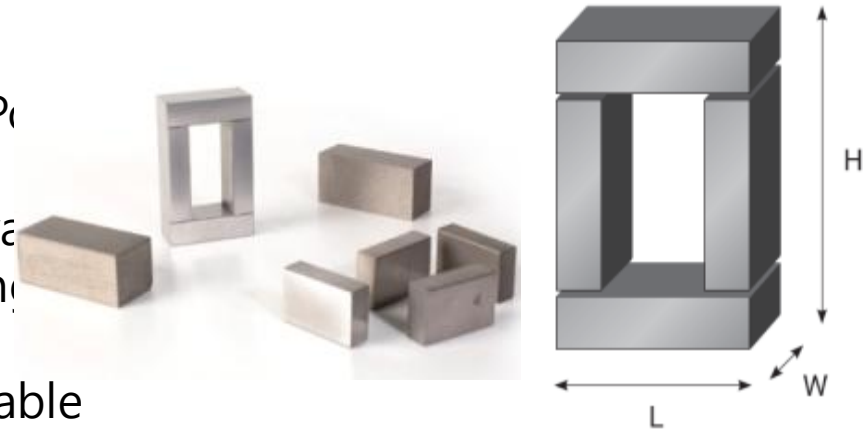

P/N	Assembled Dimensions [mm]			Path Length (cm)	Cross Section Area (cm ²)
	L	W	H		
503015	50.00	30.00	80.00	18.71	4.50
503020	50.00	30.00	90.00	18.28	6.00
603015	60.00	30.00	90.00	22.71	4.50
603020	60.00	30.00	100.00	22.28	6.00
703015	70.00	30.00	100.00	26.71	4.50
703020	70.00	30.00	110.00	26.28	6.00
803015	80.00	30.00	110.00	30.71	4.50
803020	80.00	30.00	120.00	30.28	6.00